

GO-GO

ELITE TRAVELLER®

The Quickest Way to Travel.

The Go-Go Elite Traveller®'s compact design allows it to easily maneuver in tight spaces while providing stable outdoor performance. Take the guesswork out of travel with simple, one hand Feather-touch disassembly. Go where you want to go, easily, with the Go-Go Elite Traveller.



Go-Go Elite Traveller®, 3-wheel



Go-Go Elite Traveller®, 4-wheel

Available as a 3 & 4 wheel scooter



Feather-touch disassembly.

Pride®
Mobility Products Corp.



The Go-Go Elite Traveller® Series includes the Elite Traveller LR 3 & 4-Wheel.

LR version features a 17AH battery pack for extended range.

FEATURES

- Feather-touch disassembly permits simple frame separation with only one hand
- Pride's exclusive black non-scuffing tires
- Auto-connecting front to rear cable
- Includes 3 sets of easily changeable colored panels in 3 exciting colors - Red, Blue and Silver
- Front frame-mounted seat post offers maximum stability
- All-new frame design easily disassembles into 5 super lightweight pieces for convenient transport and storage
- Modular design for easy serviceability
- Microprocessor-based controller offers optimal power management and added safety features
- Standard front tiller-mounted basket included
- Removable deck basket for additional storage (4-wheel only)
- Convenient off-board dual voltage charger can charge battery pack on-board or off-board

SPECIFICATIONS

Model numbers	SC40LR (3-wheel); SC44LR (4-wheel) SC40E (3-wheel); SC44E (4-wheel)
Max. weight capacity	275 lbs.
Maximum speed ²	Up to 4.25 mph
Ground clearance ¹	3-wheel: 2.625" 4-wheel: 2.5"
Turning radius ¹	3-wheel: 32.5" 4-wheel: 43.25"
Overall length ¹	3-wheel: 36.5" 4-wheel: 39.75"
Overall width ¹	3-wheel: 19.25" 4-wheel: 19.125"
TIRES:	
Front	3-W: 2" x 8" solid 4-W: 2" x 7" solid
Rear	2.5" x 8" solid
Anti-tips	Rear
Standard seating	Foldable, compact, vinyl-covered molded plastic
Drive train	24-volt DC motor, sealed mini-transaxle
Dual braking system	Regenerative and electromechanical
Battery charger	Off-board, 2 amp
Per-charge range ^{2,5}	3W: 10 miles/up to 9 miles (w/ 2 x 12 AH) 4W: 7.5miles/up to 14 miles (w/ 2 x 17 AH) ⁶
Battery requirements ³	(2) 12V deep-cycle (standard)
Compatible batteries	12 AH; 17 AH with LR only

WEIGHT:

Batteries (2 required) ⁴	12 AH (21 lbs. battery pack) 17 AH (33 lbs. battery pack) ⁶
Weight w/o battery pack	3-wheel: 75 lbs. 4-wheel: 78.5 lbs.
Heaviest piece	3-wheel: 28 lbs. (front section) 4-wheel: 33.5 lbs. (front section)

Standard Colors



3 sets of exciting colors with every scooter!

(US) 800-800-8586 • (Canada) 888-570-1113 • www.pridemobility.com

¹Due to manufacturing tolerances and continued product improvement, this specification is subject to a variance of +/- 3%.

²Varies with user weight, terrain type, battery amp-hour (AH), battery charge, battery condition and tire condition. This specification can be subject to a variance of (+ or -) 10%.

³AGM or gel cell type recommended.

⁴Battery weight may vary based on manufacturer.

⁵Tested in accordance with ANSI/RENSA, WC Vol 2, Section 4, and ISO 7176-4 standards. Results derived from theoretical calculations based on battery specifications and drive system performance. Test conducted at maximum weight capacity.

⁶LR version only.

The information contained herein is correct at the time of publication. We reserve the right to alter specifications without prior notice.


Silver Star® Lifts & Ramps

These Silver Star® Lifts are compatible with the Go-Go Elite Traveller®.

- Backpacker® Plus
- Backpacker® MV
- Power Tote Mini (3-wheel only)



Silver Boom 300

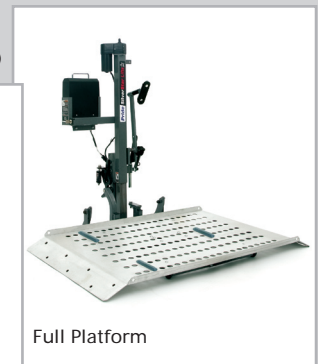

Full Platform